BEST AVAILABLE COPY





CIPO CANADIAN INTELLECTUAL PROPERTY OFFICE

Orrawa Hull K1A 0C9

(21) (A1)

2,118,711

(88)

1992/09/02

(43)

1993/03/18

- (51) INTL.CL. C08F-010/06; C08F-004/642; C08F-004/68
- (19) (CA) APPLICATION FOR CANADIAN PATENT (12)
- (54) Preparation of Polypropylene Under High Pressure
- (72) Littmann, Dieter Germany (Federal Republic of); Evertz, Kaspar - Germany (Federal Republic of); Schlund, Rueger - Germany (Federal Republic of) Muchlenbernd, Thomas - Germany (Federal Republic of); Konrad, Rainer - Germany (Federal Republic of); Klimesch, Roger - Germany (Federal Republic of); Kerth, Juergen - Germany (Federal Republic of); Schweier, Guenther - Germany (Federal Republic of);
- (71) BASF Aktiengesellschaft Germany (Federal Republic of) ;
- (30) (DE) P 41 30 299.0 1991/09/12
- (57) 2 Claims

This application is as filed and may therefore contain an Notice: incomplete specification. .



Industrie Canada

PCT

WELTORGANISATION FUR GEISTIGES EIGENTUM Internationales Büro

INTERNATIONALE ANMELDUNG VERÖFFENTLICHT NACH DEM VERTRAG ÜBER DIE INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES PATENTWESENS (PCT)

(51) Internationale Patentklassifikation 5:

(11) Internationale Veröffentlichungsnummer:

WO 93/05082

打造工作工作 经人工人等的

C08F 10/06, 4/602

(43) Internationales Veröffentlichungsdatum:

18. März 1993 (18.03.93)

(21) Internationales Aktenzeichen:

PCT/EP92/02017

(22) Internationales Anmeldedatum:

2. September 1992 (02.09.92)

AKTIENGESELL-(74) Gemeinsamer Vertreter: BASF SCHAFT: Carl-Bosch-Strasse 38, D-6700 Ludwigshafen (DE).

(30) Prioritätsdaten:

P 41 30 299.0

12. September 1991 (12.09.91) DE

(81) Bestimmungsstaaten: CA, FI, HU, JP, KR, NO, RU, US, europäisches Patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, SE).

(71) Anmelder (für alle Bestimmungsstaaten ausser US): BASF AKTIENGESELLSCHAFT [DE/DE]; Carl-Bosch-Strasse 38, D-6700 Ludwigshafen (DE).

(72) Erfinder; und

(75) Erfinder/Anmelder (nur für US) : LITTMANN, Dieter [DE/ DE]; Neckarpromenade 36, D-6800 Mannheim I (DE). EVERTZ, Kaspar [DE/DE]; Gleiwitzer Strasse 4, D-6707 Schifferstadt (DE). SCHLUND, Rueger [DE/DE]; B 5,12, D-6800 Mannheim I (DE). MUEHLEN-BERND, Thomas [DE/DE]; Siegelsmauer 3a, D-6900 Heidelberg (DE). KONRAD, Rainer [DE/DE]; Gartenweg 7, D-6701 Goennheim (DE). KLIMESCH, Roger [DE/DE]; Georg-Froeba-Strasse 43, D-6146 Alsbach-Haehnlein (DE). KERTH, Juergen [DE/DE]; Wattenheimer Strasse 15, D-6719 Carlsberg (DE). SCHWEIER, Guenther [DE/DE]; Friedrich-Pietzsch-Strasse 14, D-6701 Friedelsheim (DE).

Veröffentlicht

Mit internationalem Recherchenbericht.

211871,1

(54) Title: HIGH-PRESSURE PROCESS FOR PRODUCING POLYPROPYLENE

(54) Bezeichnung: VERFAHREN ZUR HERSTELLUNG VON POLYPROPYLEN UNTER HOCHDRUCK

(57) Abstract

A process is disclosed for producing homopolymers of propylene or copolymers of propylene with other olefins or their mixtures. Polymerisation is carried out under pressures from 100 to 3000 bars and at temperatures from 100 to 330° C, using as catalyst a metallocene catalyst system.

(57) Zusammenfassung

Versahren zur Herstellung von Homopolymerisaten des Propylens oder Copolymerisaten des Propylens mit anderen Olesinen oder deren Mischungen, wobei man bei Drücken von 100 bis 3000 bar und bei Temperaturen von 100 bis 330° C polymerisiert und als Katalysator ein Metallocenkatalysatorsystem verwendet.

BEST AVAILABLE COPY

在教育、大学などのはいかのは、大学などのないのは、大学などのないないでは、大学などのないないでは、大学などのないないないでは、大学などのないないでは、大学などのないのは、大学などのないのでは、大学などのないのでは、

. 5

10

15

20

25

30

35

- Preparation of polypropylene under high pressure

The present invention relates to a process for the preparation of homopolymers of propylene or copolymers of propylene with other olefins or mixtures thereof.

Processes for the preparation of homo- and/or copolymers of propylene at low pressures and with the use of Ziegler catalyst systems are disclosed in, for example, EP-A 351 392 and EP-A 321 852. However, heterogeneous systems are present, the productivities are unsatisfactory and the choice of comonomers is limited.

It is an object of the present invention to provide a process for the preparation of homo- and/or copolymers of propylene which does not have the stated disadvantages.

We have found that this object is achieved by a process for the preparation of homopolymers of propylene or copolymers of propylene with other olefins or mixtures thereof, wherein polymerization is carried out at from 100 to 3000 bar and at from 100 to 330°C and the catalyst used is a metallocene catalyst system.

These processes give linear homopolymers with propylene or linear copolymers which have short chain branches.

Cyclic olefins of 3 to 12, preferably 4 to 8, carbon atoms, dienes, in particular α, ω -dienes of 4 to 10 carbon atoms, such as hexa-1,5-diene, and olefins of 2 to 10 carbon atoms, preferably ethylene, butenes and hexenes, have proven suitable as olefins which can be copolymerized with propylene, the α -olefins being particularly preferred. These olefins may also have aryl or hetero element substituents, such as styrene or unsaturated substituted silanes.

As a rule, these comonomers are used in amounts of from 0.1 to 99.9, preferably from 1 to 99, % by weight, based on the amount of propylene.

The catalysts used are metallocene catalyst systems which contain, among the active components, a

-

O.Z. 0050/42666

complex of metals of subgroups IV and V of the Periodic Table, in particular of titanium, zirconium, hafnium, vanadium, niobium or tantalum. Preferably used complexes are those in which the metal atom is bonded via π bonds to unsaturated cyclic hydrocarbon atoms, for example cyclopentadienyl, fluorenyl or indenyl groups. Furthermore, in the preferably used complexes, the metal atom may also be bonded to further ligands, in particular to fluorine, chlorine, bromine and iodine or to C_1 - C_{10} -alkyl, for example methyl, ethyl, propyl or butyl. Particularly suitable complexes contain in particular chlorine.

Preferred metallocene catalyst systems contain, as active components,

a) a metallocene complex of the general formula I

$$R^3$$
 R^4
 R^5
 R^1
 R^5
 MX_2

15

20

25

30

5

10

where

M is titanium, zirconium, hafnium, vanadium, niobium or tantalum,

X is fluorine, chlorine, bromine, iodine, hydrogen, C_{10} -alkyl, C_{6} - C_{15} -aryl or $-OR^{6}$,

 R^6 is C_1 - C_{10} -alkyl, C_6 - C_{15} -aryl, alkylaryl, arylalkyl, fluoroalkyl or fluoroaryl, each having from 1 to 10 carbon atoms in the alkyl radical and 6 to 20 carbon atoms in the aryl radical,

 R^1 to R^5 are each hydrogen, C_1-C_{10} -alkyl, 5-membered to 7-membered cycloalkyl which in turn may carry a C_1-C_6 -alkyl radical as a substituent, C_6-C_{15} -aryl or arylalkyl, where two adjacent radicals together may furthermore form unsaturated cyclic groups of 4 to 15 carbon atoms, or $Si(R^7)_3$, R^7 is C_1-C_{10} -alkyl, C_6-C_{15} -aryl or C_3-C_{10} -cycloalkyl,

O.Z. 0050/42666

BEST AVAILABLE COPY

5


20

Z is X or

 R^8 to R^{12} are each hydrogen, C_1-C_{10} -alkyl, 5-membered to 7-membered cycloalkyl which in turn may carry a C_1-C_{10} -alkyl radical as a substituent, C_6-C_{15} -aryl or arylalkyl, and two adjacent radicals together may form cyclic groups of 4 to 15 carbon atoms, or $Si(R^{13})_3$, R^{13} is C_1-C_{10} -alkyl, C_6-C_{15} -aryl or C_3-C_{10} -cycloalkyl, or R^4 and Z together form a group $-[Y(R^{14})_2]_0-E^-$,


or R^4 and Z together form a group $-[Y(R^{14})_2]_n-E-$, Y is silicon, germanium, tin or carbon,


10 R^{14} is C_1-C_{10} -alkyl, C_3-C_{10} -cycloalkyl or C_6-C_{10} -cycloalkyl, n is 1, 2, 3 or 4,



 R^{15} is C_1-C_{10} -alkyl, C_6-C_{15} -aryl, C_3-C_{10} -cycloalkyl, alkylaryl or $Si(R^{16})_3$ and R^{16} is C_1-C_{10} -alkyl, C_6-C_{15} -aryl, C_3-C_{10} -cycloalkyl or alkylaryl, and

b) an open-chain or cyclic alumoxane compound of the general formula II or III





5

O.Z. 0050/42666

where R^{17} is C_1 - C_4 -alkyl and m is an integer of from 5 to 30.

Among the metallocene complexes of the general formula \mathbf{I} ,

$$R^{3}$$
 R^{4}
 R^{5}
 R^{1}
 R^{5}

Ιa

Ic and

如此一次各四年間一個不過一個人一個人一個人一個人

11、一個人工行為各種的學

BEST AVAILABLE COPY

$$\begin{bmatrix} (R^{14})_2 Y \end{bmatrix}_n \qquad MX_2$$

are preferred.

5

10

15

20

25

Paticularly preferred compounds of the formula Ia are those in which M is titanium, zirconium or hafnium, X is chlorine and R^1 to R^5 are each hydrogen or C_1 - C_4 -alkyl.

Particularly preferred compounds of the formula Ib are those in which M is zirconium or hafnium, X is chlorine, R^1 to R^5 are each hydrogen, C_1 - C_4 -alkyl or $Si(R^7)_3$ and R^6 to R^{10} are each hydrogen, C_1 - C_4 -alkyl or $Si(R^{13})_3$.

particularly suitable compounds of the formula Ib are those in which the cyclopentadienyl radicals are identical, the unsubstituted cyclopentadienyl radicals being preferred.

Particularly suitable compounds of the formula Ic are those in which R^1 and R^8 are identical and are each hydrogen or C_1 - C_{10} -alkyl, R^5 and R^{12} are identical and are each hydrogen, methyl, ethyl, isopropyl or tert-butyl, R^3 and R^{10} are C_1 - C_4 -alkyl, R^2 and R^9 are each hydrogen, or two adjacent radicals R^2 and R^3 , and R^9 and R^{10} , together form unsaturated cyclic groups of 4 to 12 carbon atoms, R^{14} is C_1 - C_9 -alkyl, M is zirconium or hafnium, Y is silicon, germanium, tin or carbon and X is chlorine.

Examples of particularly suitable complexes include dimethylsilanediylbis-(3-tert-butyl-5-methylcyclopenta-dienyl)zirconium dichloride,

diethylsilanediylbis-(3-tert-butyl-5-methylcyclopenta-dienyl)zirconium dichloride,

methylethylsilanediylbis-(3-tert-butyl-5-methylcyclopentadienyl)zirconium dichloride,

- 5 dimethylsilanediylbis-(3-tert-butyl-5-ethylcyclopentadienyl)zirconium dichloride,
 - dimethylsilanediylbis-(3-tert-butyl-5-methylcyclopenta-dienyl)dimethylzirconium,
 - dimethylsilanediylbis-(2-methylindenyl)zirconium dichloride,
- diethylsilanediylbis-(2-methylindenyl)zirconium dichloride,
 - dimethylsilanediylbis-(2-ethylindenyl)zirconium dichloride,
- dimethylsilanediylbis-(2-isopropylindenyl)zirconium dichloride,
 - dimethylsilanediylbis-(2-tert-butylindenyl)zirconium dichloride,
 - diethylsilanediylbis-(2-methylindenyl)zirconium
- 20 dibromide,

10

- dimethylsulfidebis-(2-methylindenyl)zirconium dichloride, dimethylsilanediylbis-(2-methyl-5-methylcyclopenta-dienyl)zirconium dichloride,
 - dimethylsilanediylbis-(2-methyl-5-ethylcyclopenta-dienyl)zirconium dichloride,
- dimethylsilanediylbis-(2-ethyl-5-isopropylcyclopenta-dienyl)zirconium dichloride, ...
 - dimethylsilanediylbis-(2-methylindenyl)zirconium dichloride,
- dimethylsilanediylbis-(2-methylbenzindenyl)zirconium dichloride and
 - dimethylsilanediylbis-(2-methylindenyl)hafnium dichloride.

In the compounds of the general formula Id, particularly suitable ones are those in which M is zirconium or hafnium, X is chlorine or C_1 - C_{10} -alkyl, Y is silicon or carbon when n is 1 or carbon when n is 2, R^{14}

is C_1 - C_6 -alkyl, C_5 - or C_6 -cycloalkyl or C_6 - C_{10} -aryl, A is -O-, -S- or NR^{15}

and R¹ to R³ and R⁵ are each hydrogen, C_1-C_{10} -alkyl, C_3-C_{10} -cycloalkyl, C_6-C_{15} -aryl or $Si(R^7)_3$.

5

10

20

25

30

35 ·

Complexes of this type can be synthesized by conventional methods, the reaction of the correspondingly substituted, cyclic hydrocarbon anions with halides of titanium, zirconium, hafnium, vanadium, niobium or tantalum being preferred. Examples of corresponding preparation processes are described in, inter alia, Journal of Organometallic Chemistry 369 (1989), 359-370.

The metallocene complexes may also be present in cationic form, as described in EP-A 277 003 and EP-A 277 004.

In addition to the complexes, the metallocene catalyst systems generally also contain oligomeric alumoxane compounds of the general formula II or III, where R¹⁷ is preferably methyl or ethyl and m is from 10 to 25.

The preparation of these oligomeric alumoxane compounds is usually carried out by reacting a solution of trialkylaluminum with water and is described in, inter alia, EP-A 284 708 and US-A 4,794,096.

というできたとうなどのないというないとうないとうないというというないというというないというというできません

からまとうながけ ガンシ

As a rule, the oligomeric alumoxane compounds obtained are in the form of mixtures of both linear and cyclic chain molecules of different lengths, so that m is to be regarded as an average value. The alumoxane compounds may also be present as a mixture with other metal alkyls, preferably with alkylaluminums.

In the novel process, it has proven advantageous to use the complex of metals of subgroups IV and V of the Periodic Table and the oligomeric alumoxane compounds in amounts such that the atomic ratio of aluminum from the oligomeric alumoxane compound to the transition metal from the complex of metals of subgroups IV and V of the Periodic Table is from 10:1 to $10^6:1$, in particular

被我在官人名 人名英阿塞瓦

from $10 : 1 to 10^4 : 1$.

5

10

15

20

25

30

For the novel process, the catalysts are generally used in an amount of from 10^{-1} to 10^{-9} , preferably from 10^{-2} to 10^{-5} , mol/l of metal.

The process can be carried out in the reactors usually used for high pressure polymerization, for example in stirred autoclaves.

It has proven advantageous first to mix the complex of metals of subgroups IV and V of the Periodic Table with the oligomeric alumoxane compound before the polymerization, with the result that an activated catalyst system is formed. The duration of the activation step is usually from 1 to 120 minutes, preferably from 10 to 100 minutes. Mixing is preferably carried out in such a way that the complex is brought into contact with the solution of the oligomeric alumoxane compound in an inert solvent, for example in benzene, toluene, hexane, heptane or a mixture thereof, at from 0 to 50°C.

The novel process can be carried out by a method in which the solutions of complexes and oligomeric alumoxane compounds are mixed upstream of the reactor and/or are fed into the reactor at a plurality of points. The polymerization can be carried out batchwise or continuously. Pressures of from 100 to 3,500 bar, preferably from 500 to 3,000, in particular from 1,000 to 3,000, bar and temperatures of from 100 to 330°C, preferably from 120 to 300°C, in particular from 120 to 250°C, are employed. The residence times are from 20 to 240, preferably from 30 to 120, seconds.

The essential advantages of the novel process are that high productivities are achieved, the choice of comonomers is very large and high conversions are reached in conjunction with short residence times and high molecular weights.

BEST AVAILABLE COPY


- 9 -

O.Z. 0050/42666

化分子 的复数医生性病 经存货的数据的复数人

EXAMPLES EXAMPLE 1

Preparation of a propylene homopolymer (PP) 400 mg (= 1 mmol) of

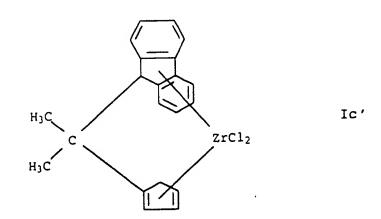

were dissolved in a mixture of 50 ml (36 g, 0.5 mol) of trimethylaluminum and 290 g of a 1.53 molar solution of methylalumoxane (0.5 mol) in 10 l of toluene. 10 m³ of propylene/h and the solution described above were metered into a continuous high pressure stirred autoclave in the absence of air and moisture.

Table 1 shows the experimental conditions and the results.

The weight average molecular weight $\overline{M}_{\!w}$ was determined by gel permeation chromatography.

TABLE 1

Temperature [°C]	Pressure [bar]	g Ic'/h	Residence time [min]	Productivity [g PP/g Ic'·h]	स ,
149	1,510	0.17	1.5	8,380	2,000

25

5

10

15

20

EXAMPLE 2

Preparation of a propylene/ethylene copolymer

The procedure described in Example 1 was followed, except that a mixture of propylene and ethylene was

polymerized.

Table 2 shows the experimental conditions and the results.

TABLE 2

10	Temperature [°C]	Pressure [bar]	1	2 by wt. of propylene to 2 by wt. of ethylene in the gas mixture	[g polymer/	₩,
	190	1,508	0.078	77/23	24,358	10,000

BEST AVAILABLE COPY

- 11 -

We claim: -

5

10

20

25 '

- 1. A process for the preparation of a homopolymer of propylene or of a copolymer of propylene with other olefins or mixtures thereof, wherein polymerization is carried out at from 100 to 3,000 bar and at from 100 to 330°C and the catalyst used is a metallocene catalyst system.
- 2. A process as claimed in claim 1, wherein a metallocene catalyst system is used which contains, as active components,
- a) a metallocene complex of the formula I

$$R^3$$
 R^4
 R^5
 R^1
 R^2
 R^3
 R^2
 R^3
 R^2

where

 M is titanium, zirconium, hafnium, vanadium, niobium or tantalum,

X is fluorine, chlorine, bromine, iodine, hydrogen, C_{10} -alkyl, C_{6} - C_{15} -aryl or $-OR^{5}$,

 R^6 is C_1 - C_{10} -alkyl, C_6 - C_{15} -aryl, alkylaryl, arylalkyl, fluoroalkyl or fluoroaryl, each having from 1 to 10 carbon atoms in the alkyl radical and 6 to 20 carbon atoms in the aryl radical,

 R^1 to R^5 are each hydrogen, C_1 - C_{10} -alkyl, 5-membered to 7-membered cycloalkyl which in turn may carry a C_1 - C_{10} -alkyl radical as a substituent, C_6 - C_{15} -aryl or arylalkyl, where two adjacent radicals together may furthermore form cyclic groups of 4 to 15 carbon atoms, or $Si(R^7)_3$, R^7 is C_1 - C_{10} -alkyl, C_6 - C_{15} -aryl or C_3 - C_{10} -cycloalkyl,

$$z$$
 is x or
$$R^{12}$$

O.Z. 0050/42666

的复数人名意西西蒙特 不知一學的行為於縣縣 通知 医不足

 R^8 to R^{12} are each hydrogen, C_1 - C_{10} -alkyl, 5-membered to 7-membered cycloalkyl which in turn may carry a C_1 - C_{10} -alkyl radical as a substituent, C_6 - C_{15} -aryl or arylalkyl, and two adjacent radicals together may form cyclic groups of 4 to 15 carbon atoms, or $Si(R^{13})_3$, R^{13} is C_1 - C_{10} -alkyl, C_6 - C_{15} -aryl or C_3 - C_{10} -cycloalkyl, or R^4 and Z together form a group - $[Y(R^{14})_2]_n$ -E-, Y is silicon, germanium, tin or carbon,

Y is silicon, germanium, tin or carbon, R^{14} is C_1-C_{10} -alkyl, C_3-C_{10} -cycloalkyl or C_6-C_{15} -cycloalkyl, n is 1, 2, 3 or 4,

E is R8 or A,

R10 R9


A is -O-, -S-, NR15 or PR15

 R^{15} is $C_1-C_{10}-alkyl,\;C_6-C_{15}-aryl,\;C_3-C_{10}-cycloalkyl,\;alkylaryl\;or\;Si(R^{16})_3$ and

15 R^{16} is C_1-C_{10} -alkyl, C_6-C_{15} -aryl, C_3-C_{10} -cycloalkyl or alkylaryl,

and

b) an open-chain or cyclic alumoxane compound of the formula II or III



where R^{17} is C_1-C_4 -alkyl and m is an integer of from 5 to 30.

20

5

10